

NOTES :



- ② 1. HOUSING MATERIAL : 300 SER. STAINLESS STEEL
- 2. LEADS, NONWICKING WIRE WITH PLASTIC SHIELDING TERMINATING IN EPOXY.
- 3. RECOMMENDED GAP : GEAR TO MAGNETIC SENSOR : 3/4 TURN.
- 4. MAX. INSTALLATION TORQUE : 40 FT.-LBS.
- 5. SPECIAL LENGTHS AND CONNECTIONS AVAILABLE.

**SINGLE MAGNETIC SENSOR**

③ (480 OHMS)

**FLYWHEEL GEAR :**

OUTSIDE DIA. 14"  
 NO. OF TEETH : 139  
 DIAMETRAL PITCH : 10  
 AIR GAP : .050"

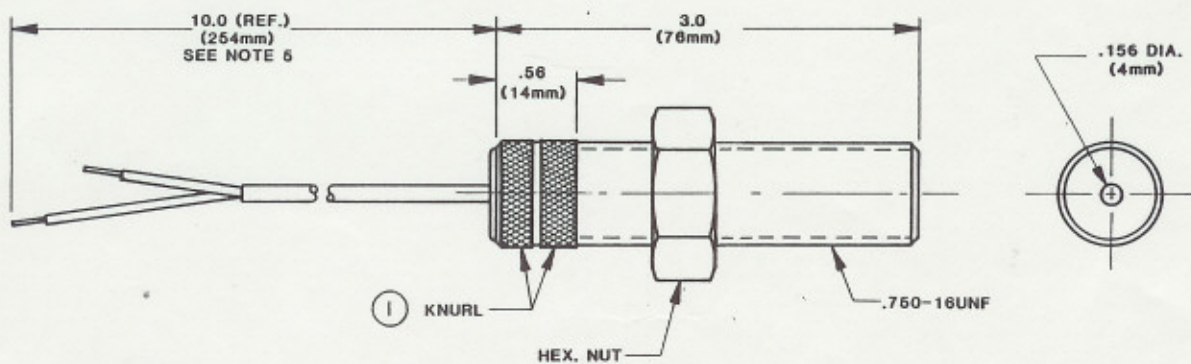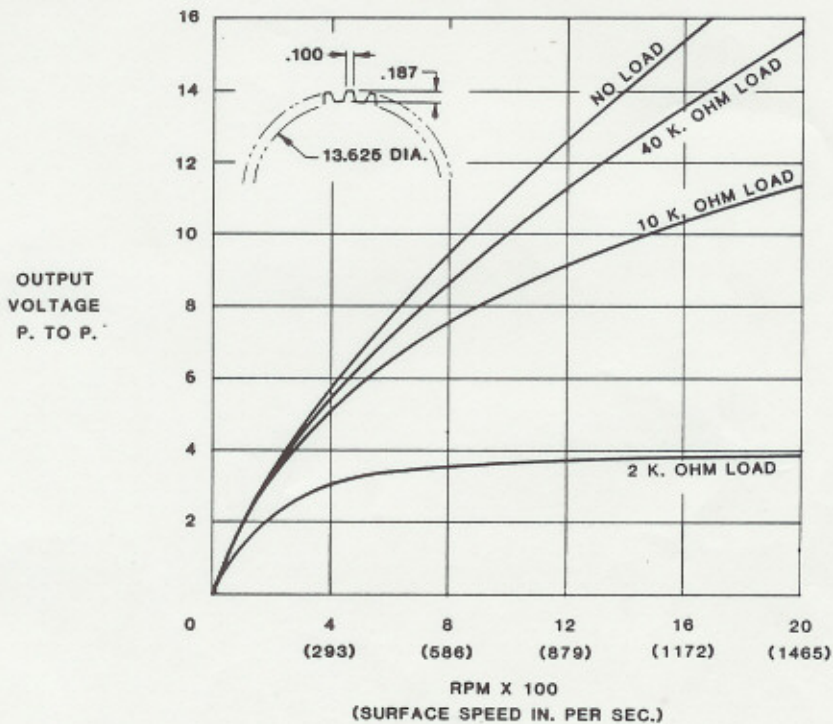

REVISIONS			TOLERANCES		Aetna Engineering	
①	DESCRIPTION	DATE	BY	UNLESS OTHERWISE SPECIFIED: .x = ± .050 .xx = ± .030 .xxx = ± .010 FRACTIONS = ± 1/32 ANGLES = ± 2°	TITLE: <b>SINGLE MAGNETIC SENSOR</b> FOR FLYWHEEL GEAR	
②	WAS 3/4 HEX.	8-16-85	SN		DRAWN BY SON	PART NO. 8910
③	WAS ALUMINUM	8-16-85	SN		APPR. BY <i>SL</i>	
	WAS 1,600 OHMS	9-16-85	SN		DATE: 8-16-85	
					SCALE NONE	